

3500

Valvelon®



MAINTENANCE
SPECIALTIES

Unique multi-layered, 100% PTFE anti-extrusion construction sealant conforms to surface shapes. Ideal for valve packing and flange gaskets, withstands a wide range of temperatures and seals virtually all chemicals.



APPLICATIONS:


Generally all substances within a pH range of 0 to 14
Steam, salt water, air, refrigerants, sulfuric acid, hydrochloric acid, nitric acid, chromic acid

Sodium hydroxide, potassium hydroxide, kerosene, gasoline, perchloroethylene, hydrogen, ammonia, fluorinated solvents
Chlorine, propane, butane, nitrogen

CAUTION:

Do not use on liquid or gaseous oxygen, molten alkali metals and some rare halogenated compounds

3

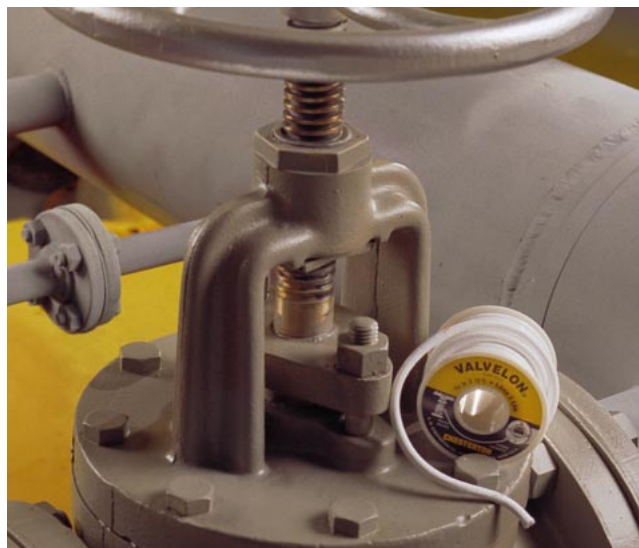

PRODUCT CHARACTERISTICS:

Packs valves/Seals flanges – Dense, wrapped construction conforms to fill voids, making a tight seal without cold flow extrusion.

Non-hardening

Non-toxic

Unlimited shelf life

Reduces stem valve packing and gasket inventories

Chemically inert

Wide temperature range
–240°C (–400°F) to 260°C (500°F)

High tensile strength



SPOOL SIZE 3500-Metric	REORDER NUMBER
2,4 mm x 15,3 M	003566
4,0 mm x 10,7 M	003570
5,6 mm x 4,6 M	003574
7,1 mm x 2,7 M	003578
Kit contains 3 spools of each size	003500

SPOOL SIZE 3500-Inch	REORDER NUMBER
3/32" x 50'	003566
5/32" x 35'	003570
7/32" x 15'	003574
9/32" x 9'	003578
Kit contains 3 spools of each size	003500